(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 14 April 2005 (14.04.2005)

PCT

(10) International Publication Number WO 2005/032805 A1

(51) International Patent Classification7: B32B 15/08, 3/08, 3/10, 15/14

B29C 70/88,

(74) Agent: VAN WESTENBRUGGE, Andries et al.; Ned-

(21) International Application Number:

PCT/NL2004/000700

(22) International Filing Date: 5 October 2004 (05.10.2004)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

1024479

7 October 2003 (07.10.2003)

(71) Applicant (for all designated States except US): STORK FOKKER AESP B. V. [NL/NL]; Industrieweg 4, NL-3351 LB Papendrecht (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): RAJABALI, Faziel, Abdoel [NL/NL]; Fideliohof 70, NL-2402 BT Alphen A/D Rijn (NL). TER STEEG, Willem, Jan, Nicolaas [NL/NL]; Friedrich Miethe weg 36, D-59159 Pulheim (DE).

erlandsch Octrooibureau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, BG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,

PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FL, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SB, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

ZW.

with international search report

[Continued on next page]

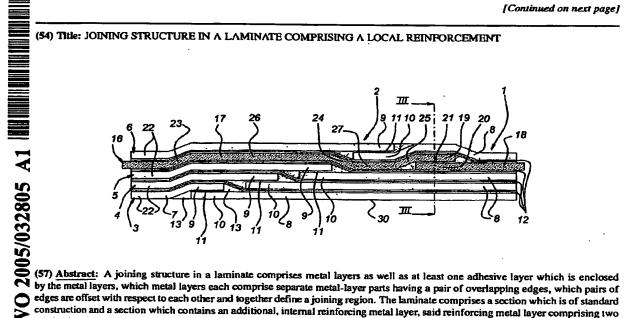

edges are offset with respect to each other and together define a joining region. The laminate comprises a section which is of standard construction and a section which contains an additional, internal reinforcing metal layer, said reinforcing metal layer comprising two reinforcing metal-layers parts with a pair of overlapping edges, said pair of edges being located outside the joining region.